

DHI-VTNS2003B-2

2-wire Switch



- Supports 10-level cascade through the 2-wire port
- Supports connecting to 20 indoor monitors and 2 door stations
- Supports connecting through RJ45 port

Technical Specification

Basic

Status Indicator Light	4
Communication Mode	2-wire
Cascade Ability	10

Port

port	Two 2-wire ports for cascade
port	Two RJ45 ports, 10 Mbps/100 Mbps Ethernet
port	One 2-wire device port

General



Casing	PC + ABS
Appearance color	White
Power Supply	DC 48V, 1A-5A
Power Adapter	Optional
Installation	Guide rail mount
Certifications	CE; FCC; UL
Accessory	Power converter cable
Product Dimensions	131.1 mm × 103 mm × 40 mm (5.16" × 4.06" × 1.57")
Operating Temperature	-10°C to +55°C (14°F to 131°F)
Operating Humidity	10%–95% (RH, non-condensing)

Operating Altitude	0-3000 m
Power Consumption	≤ 15W (KIT)
Net Weight	0.25 kg (0.55lb)
Gross Weight	0.39 kg (0.86 lb)

Ordering Information

Type	Model	Description
2-wire Switch	DHI-VTNS2003B-2	2-wire Switch
Accessories	ADS-65LSI-52-1 48060G VI	Power supply finished product-AC/DC power adapter-DC power adapter-AC100V~240V-48V1.25A-VI-Φ6.5×Φ1.35×10
	EDP-240-48	Power supply finished product-AC/DC certified power supply-Power supply-AC100V~240V-48V5A

Dimensions (mm[inch])

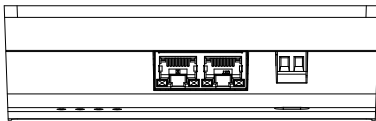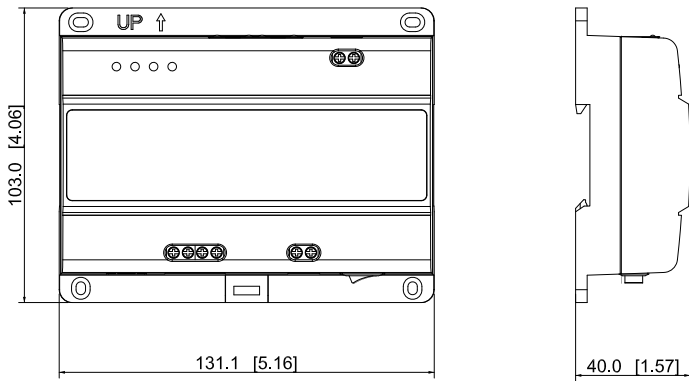

Application

