

DH-SDT4E425-8P-GB-APV1

8+4MP 25x TiOC Network Panoramic PTZ Camera



 Xinghan 

System Overview

Designed with more lens than the conventional PTZ camera, the X-Spans series camera captures an expansive view, producing wide, vivid images. It has the combined power of the panoramic and detail camera in its structure and is highly cost-effective, greatly reducing the installation cost of security systems. It also leverages its two cameras to perform smart tracking, and has an independent mode that allows you to separately use each camera.

Functions

Starlight Technology

For challenging low-light conditions, Dahua's Starlight Ultra-low Light Technology has exceptional light sensitivity, capturing images in vivid detail, even in lighting as low as 0.005 lux. The camera uses a set of optical features to balance light throughout the scene, producing clear images in dark environments.

Smart Codec

With advanced scene-adaptive rate control algorithm, Dahua smart codec technology realizes the higher encoding efficiency than H.265 and H.264, provides high-quality video, and reduces the cost of storage and transmission.

Perimeter Protection

Automatically filters out false alarms caused by animals, rustling leaves, bright lights, and more, and uses secondary recognition during target detection to improve alarm accuracy.

Acupick

This industry-leading search technology effectively utilizes both front-end and back-end intelligence to help with searching through massive video data to quickly and conveniently locate targets with greater precision.

- Overview channel: Outputs 180° wide angle splicing image
- Detail channel: 1/2.8"4Megapixel CMOS
- 25x optical zoom
- Max. 25/30 fps@8M
- IR distance up to 100 m
- Smart tracking
- Perimeter protection
- Active deterrence
- Smart dual light +



Xinghan Large-Scale AI Models-Vision

Xinghan Large-Scale AI Models-Vision seamlessly expands the storage and operational capacity of algorithmic models through the powerful integration of edge AI model algorithms and NPU computing power. Engineered with a lightweight transformer architecture and enhanced by model distillation and quantization techniques, it optimizes the computing power consumption of ViT operators. This enables the system to collaborate on multiple tasks simultaneously through joint inference between small and large models optimized for edge devices.

Smart Tracking

The panoramic camera links with the detail camera to track targets. When the target enters the panoramic area, the detail camera starts to monitor them and tracks their movement by rotating, zooming and focusing the PTZ camera lens. This allows the camera to produce highly detailed images with the movement of targets for security personnel.

Smart Dual Light

Dahua Smart Dual Light technology adopts smart algorithm to detect targets. Usually, the IR illuminator is on at night; when the target appears in the monitoring area, the white light is on, and the camera records the full-color video and information of key events. That is, the camera links snapshot and video with full-color image. When the target is out of the monitoring area, the white light is off and the IR illuminator is on, which reduces light pollution efficiently.

Protection (IP66, TVS 6000 V)


IP66, TVS 6000 V lightning proof, surge protection, and voltage transient protection.

Technical Specification						Manual Control Speed	Pan: 0.1°/s–180°/s; Tilt: 0.1°/s–90°/s
Camera						Preset Speed	Pan: 0.1°/s–180°/s; Tilt: 0.1°/s–90°/s
Image Sensor						Preset	300
Pixel						Tour	8 (up to 32 presets per tour)
Max. Resolution						Pattern	5
ROM						Scan	5
RAM						Power-off Memory	Yes
Electronic Shutter Speed						Idle Motion	Preset; Pattern; Tour; Scan
Scanning System						Intelligence	
Min. Illumination						IVS (Perimeter Protection)	Tripwire; intrusion; crossing fence detection; loitering detection; abandoned/missing object; fast moving; parking detection; people gathering; human alarm classification; linkage tracking
Illumination Distance						Smart Tracking	WizTracking: Xinghan large-scale AI models-driven human & vehicle tracking. Relay tracking: X-SPANS series only. Tracking continues after target exits overview channel until target leaves scene. Linkage tracking: X-SPANS series only. Tracks only targets visible in overview channel.
Illuminator On/Off Control						SMD	SMD4.0
Illuminator Number						Acupick	Uses deep learning algorithms and works with backend devices to accurately match targets, such as people and motor vehicles, and search through live and recorded videos to quickly locate targets (Overview channel support)
Lens						Auto Patrol	After an IVS alarm is triggered, it can link with up to 5 presets or scan to patrol the key areas. IVS can be enabled with SMD at the same time.
Focal Length						Active Deterrence	
Max. Aperture						Light Warning	Red-Blue light warning; Flash duration: 5 s–30 s; Flash frequency: high, medium, low
Field of View						Sound Warning	Offers 11 sound alarm and 10 custom sound alarms can be imported. Sound can be set from 0%–100%. Play times can be set from 1-10.
Optical Zoom						Video	
Focus Control						Video Compression	Smart H.265+;H.265;Smart H.264+;H.264B;H.264M;H.264H;MJPEG(Sub Stream 1)
Close Focus Distance						Streaming Capability	3 streams
Iris Control						Resolution	Overview channel: 8M (4096 × 1860); 2M (2048 × 928); 1080p (1920 × 1080); 720p (1280 × 720); 1024 × 448; D1 (704 × 576/704 × 480); VGA (640 × 480); CIF (352 × 288/352 × 240); Detail channel: 4M (2560 × 1440); 3M (2304 × 1296); 1080p (1920 × 1080); 1.3M (1280 × 960); 720p (1280 × 720); D1 (704 × 576/704 × 480); VGA (640 × 480); CIF (352 × 288/352 × 240)
DORI Distance	Detect	Detect	Observe	Recognize	Identify	Video Frame Rate	Overview channel: Main stream: 4096 × 1860 @ (1–25/30 fps) Sub stream 1: 1024 × 448/D1/VGA/CIF @ (1–25/30 fps) Sub stream 2: 2048 × 928/1080p/1.3M/720p @ (1–25/30 fps); Detail channel: Main stream: 4M/3M/1080p/1.3M/720p @ (1–25/30 fps) Sub stream 1: D1/VGA/CIF @ (1–25/30 fps) Sub stream 2: 1080p/1.3M/720p @ (1–25/30 fps)
*DORI (Detect, Observe, Recognize, Identify) is a standard system (EN-62676-4) for defining the ability of a person viewing the video to distinguish persons or objects within a covered area. The numbers in this table do not reflect intelligent function distances. For intelligent function distances, refer to installation and commissioning manual/project design tool.							
PTZ							
Pan/Tilt Range		Pan: 0° to 360° endless					
		Tilt: -15° to +90°, auto flip 180°					

Bit Rate Control	CBR/VBR	Certification	
Video Bit Rate	Overview channel: H264: 128 kbps–16,384 kbps H265: 51 kbps–13,312 kbps; Detail channel: H264: 96 kbps–16,384 kbps H265: 38 kbps–10,240 kbps	CE: EN 50130-4 EN 55032 EN 55035 EN 61000-3-3 EN IEC 61000-3-2 EN 62368-1	
Day/Night	Overview channel: Auto; Color; B/W; Electronic Detail channel: Auto; Color; B/W; Electronic	Port	
BLC	Yes	Audio Input	1 channel (LINE IN, bare wire)
WDR	Overview channel: DWDR; Detail channel: 120 dB	Audio Output	1 channel (LINE OUT, bare wire; built-in speaker (mutually exclusive))
HLC	Yes	Alarm Input	2 (on-off value input: 0–5 VDC)
White Balance	Overview channel: Auto; indoor; outdoor; tracking; manual; sodium lamp; natural light; street lamp Detail channel: Auto; indoor; outdoor; tracking; manual; sodium lamp; natural light; street lamp	Alarm Output	1 channel
Gain Control	Overview channel: Auto; manual; gain prio Detail channel: Auto; manual; gain prio	Alarm Linkage	Capture; recording; send email; preset; tour; pattern; alarm digital output; audio; warning light
Noise Reduction	Overview channel: 2D NR; 3D NR Detail channel: Auto: 2D NR; 3D NR	Alarm Event	Motion/tampering detection; network disconnection detection; IP conflict detection; memory card state detection; memory space detection
Motion Detection	Yes	Power	
Region of Interest (RoI)	Yes	Power Supply	12 VDC, 3 A ± 10%; PoE (802.3at)
Image Stabilization	Overview channel: NA Detail channel: Electronic Image Stabilization (EIS)	Power Consumption	Basic: 14 W; Max: 25 W (illuminator + heating glass + Siren and Light Active Deterrence + ICR + PTZ)
Defog	Overview channel: Electronic Detail channel: Electronic	Power Adapter	Optional
Digital Zoom	Overview channel: NA; Detail channel: 16x	Environment	
Image Rotation	Overview channel: NA Detail channel: 180	Operating Temperature	–40 °C to +65 °C (–40 °F to +149 °F)
S/N Ratio	Overview channel: ≥55 dB Detail channel: ≥55 dB	Operating Humidity	≤95%
Privacy Masking	Up to 24 areas can be set, with up to 8 areas in the same view Multiple colors and mosaic available	Protection	IP66; TVS 6000 V lightning proof; surge protection; voltage transient protection
Structure			
Audio			
Audio Compression	PCM, G.711A, G.711Mu, G.726, MPEG2-Layer2, G.722.1, G.729	Product Dimensions	194.2 mm × 160 mm × 311 mm (7.65" × 6.30" × 12.24") (L × W × H)
Network			
Network Port	RJ-45 (100/1,000 Base-T)	Net Weight	3.1 kg (6.83 lb)
Network Protocol	HTTP; HTTPS; TCP/IP; IPv4; RTSP; UDP; SMTP; NTP; DHCP; DNS; DDNS; IPv6; 802.1x; SSL; QoS; FTP; UPnP; ICMP; SNMP; IGMP; ARP; RTCP; RTP; PPPoE; RTMP; Bonjour; NFS	Gross Weight	4.6 kg (10.14 lb)
Interoperability	ONVIF (Profile S & Profile G & Profile T); CGI; SDK; P2P		
Streaming Method	Unicast/Multicast		
User/Host	20 (total bandwidth: 64 M)		
Storage	Micro SD card (512 GB); FTP/SFTP; NAS		
Browser	web5.0; IE 9 and later versions; Chrome 41 and later versions; Firefox 52 and later versions; Safari 10 and later versions		
Management Software	DMSS; DSS Pro		
Mobile Client	iOS; Android		

Ordering Information

Type	Model	Description
Network PTZ Camera	DH-SDT4E425-8P-GB-APV1	8+4MP 25x TiOC Network Panoramic PTZ Camera
Accessories	PFB305W	Wall Mount Bracket
	DC12V/3A	Power Adapter
	PFA126	Mount Adapter
	PFA114	Mount Adapter
	PFB300C	Ceiling Mount Bracket
	PFB301C	Ceiling Mount Bracket
	PFA151	Corner Mount Bracket
	PFA150	Pole Mount Bracket
	PFB303S	Parapet Mount Bracket
	PFB301S-E	Plane Mount Bracket

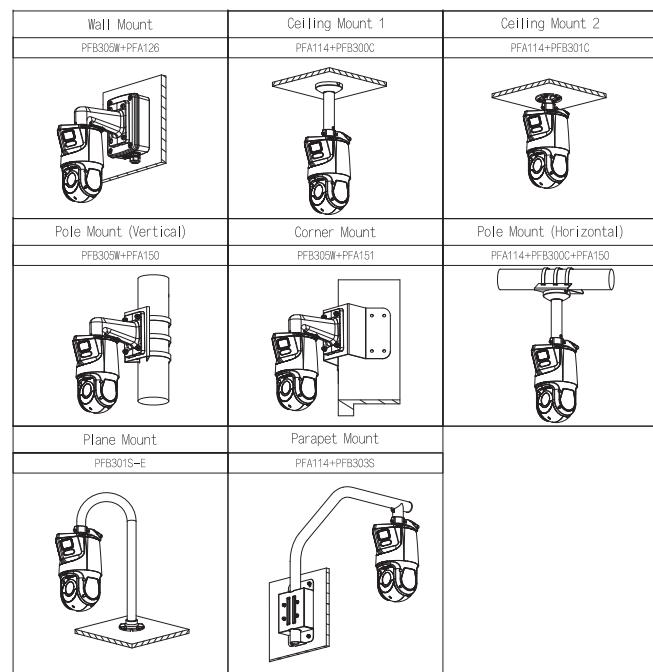

Accessories

Included:



PFB305W
Wall Mount Bracket

Optional:



DC12V/3A
Power Adapter



PFA126
Mount Adapter



PFA114
Mount Adapter



PFB300C
Ceiling Mount
Bracket



PFB301C
Ceiling Mount
Bracket



PFA151
Corner Mount
Bracket



PFA150
Pole Mount
Bracket



PFB303S
Parapet Mount
Bracket



PFB301S-E
Plane Mount
Bracket

Dimensions (mm[inch])

