

DH-SD49225GB-HNR

2MP 25x Starlight IR Network PTZ Camera



Wiz Sense

Launched by Dahua Technology, WizSense is a series of AI products and solutions that adopt independent AI chip and deep learning algorithm. It focuses on human and vehicle with high accuracy, enabling users to fast act on defined targets. Based on Dahua's advanced technologies, WizSense provides intelligent, simple and inclusive products and solutions.

System Overview

Featuring powerful optical zoom and accurate pan/tilt/zoom performance, this camera provides an all-in-one solution for capturing long distance video surveillance for outdoor applications. Together with infrared illumination and Starlight Technology, the camera is the perfect solution for dark, lowlight applications. The series combines a day/night mechanical IR cut filter for the highest image quality in variable lighting conditions during the day.

Functions

Starlight Technology

With advanced image processing technology and optical technology, Dahua Starlight technology can provide clear colorful video in the environment of low illuminance. It widely applies to various environments of low illuminance.

Protection (IP66, TVS 6000 V)

IP66, TVS 6000 V lightning proof, surge protection, and voltage transient protection.

Perimeter Protection

Automatically filters out false alarms caused by animals, rustling leaves, bright lights, etc. Enables system to act secondary recognition for the targets. Improves alarm accuracy.

- 1/2.8" STARVIS™ CMOS.
- 25x optical zoom.
- Starlight technology.
- Max. 25/30fps@2M.
- IR distance up to 100 m.
- Perimeter protection.
- Face detection.
- Quick Pick.
- SMD 4.0.
- IP66.



Face Detection

Dahua Face Detection technology can detect the face in the image. With deep learning algorithm, the technology supports detecting, tracking, capturing and selecting the best face image, and then outputs face snapshot.

SMD 4.0

Dahua Smart Motion Detection technology works with intelligent algorithms to classify targets that trigger motion detection alarms. It filters out objects that are not targets, such as small and large animals, to avoid triggering false alarms. With an AI NVR, Quick Pick technology becomes available, allowing you to easily search for and pick out human and vehicle targets from SMD event videos, prioritizing the highest matches.

Smart H.265+

Smart H.265+ is the optimized implementation of the H.265 codec that uses a scene-adaptive encoding strategy, dynamic GOP, dynamic ROI, flexible multi-frame reference structure and intelligent noise reduction to deliver high-quality video without straining the network. Smart H.265+ technology reduces bit rate and storage requirements by up to 70% when compared to standard H.265 video compression.

Technical Specification					Intelligence		
Camera					IVS (Perimeter Protection) Face Detection SMD Quick Pick	Tripwire; intrusion; crossing fence detection; loitering detection; abandoned/missing object; fast moving; parking detection; people gathering; Vehicle/Human Alarm Classification	
Image Sensor						Supports face detection, optimization, tracking, capturing pictures, uploading high-quality face snapshots, and face enhancement; Supports attributes extraction. 6 attributes and 8 expressions: Gender, age, glasses, expressions (angry, sad, hate, scary, surprise, calm, happy and confused), mask, mustache; Supports face cutout: Face, one-inch photo. Capturing strategies include real-time capturing, optimization, and quality first	
Pixel						Yes	
Max. Resolution						Yes	
ROM							
RAM					Video Video Compression Streaming Capability Resolution Video Frame Rate Bit Rate Control Video Bit Rate Day/Night BLC WDR HLC White Balance Gain Control Noise Reduction Motion Detection Region of Interest (RoI) Image Stabilization Defog Digital Zoom Image Rotation Privacy Masking S/N Ratio	1 GB	
Electronic Shutter Speed						1/1 s~1/30,000 s	
Scanning System						Progressive	
Min. Illumination						Color: 0.005 lux@F1.6 B/W: 0.0005 lux@F1.6 0 lux@F1.6 (IR light on)	
Illumination Distance						100 m (328.08 ft) (IR)	
Illuminator On/Off Control						Zoom Prio; Manual; Smart IR; Off	
Illuminator Number						4 (IR)	
Lens							
Focal Length						4.8 mm~120 mm	
Max. Aperture						F1.6~F3.5	
Field of View						H: 58.5°~2.8°; V: 33.2°~1.5°; D: 67.5°~3.2°	
Optical Zoom						25x	
Focus Control						Auto; semi-auto; manual	
Close Focus Distance						0.1 m~1.5 m (0.33 ft~4.92 ft)	
Iris Control						Auto	
DORI Distance	Detect	Observe	Recognize	Identify	PTZ Pan/Tilt Range Manual Control Speed Preset Speed Preset Tour Pattern Scan Power-off Memory Idle Motion PTZ Protocol		
	1613 m (5291.99 ft)	646 m (2119.42 ft)	323 m (1059.71 ft)	161 m (528.22 ft)			
PTZ							
Pan/Tilt Range						Pan: 0° to 360° endless Tilt: -15° to +90°, auto flip 180°	
Manual Control Speed						Pan: 0.1°~200°/s Tilt: 0.1°~120°/s	
Preset Speed						Pan: 240°/s Tilt: 200°/s	
Preset						300	
Tour						8 (up to 32 presets per tour)	
Pattern						5	
Scan						5	
Power-off Memory						Yes	
Idle Motion						Pattern; Preset; Scan; Tour	
PTZ Protocol						DH-SD Pelco-P/D(Auto recognition)	
Intelligence							
IVS (Perimeter Protection)							
Face Detection							
SMD							
Quick Pick							
Video							
Video Compression						H.264H; H.264B; Smart H.265+; H.264; H.265; MJPEG(Sub Stream); Smart H.264+	
Streaming Capability						3 streams	
Resolution						1080p (1920 × 1080); 1.3M (1280 × 960); 720p (1280 × 720); D1 (704 × 576/704 × 480); CIF (352 × 288/352 × 240)	
Video Frame Rate						Main stream: 1080p/1.3M/720p @ (1~25/30 fps) Sub stream 1: D1/CIF @ (1~25/30 fps) Sub stream 2: 1080p/1.3M/720p @ (1~25/30 fps)	
Bit Rate Control						CBR/VBR	
Video Bit Rate						H264: 64~10,496 Kbps H265: 25~6,400 Kbps	
Day/Night						Auto (ICR)/Color/B/W	
BLC						Yes	
WDR						Yes	
HLC						Yes	
White Balance						Auto; indoor; outdoor; ATW; manual; sodium lamp; natural light; street lamp	
Gain Control						Auto; manual	
Noise Reduction						2D NR; 3D NR	
Motion Detection						Yes	
Region of Interest (RoI)						Yes	
Image Stabilization						Electronic (EIS)	
Defog						Electronic	
Digital Zoom						16x	
Image Rotation						180°	
Privacy Masking						Up to 24 areas can be set, with up to 8 areas in the same view	
S/N Ratio						≥ 55 dB	
Audio							
Audio Compression						PCM; G.711a; G.711Mu; G.726; MPEG2-Layer2; G722.1; G729; G723	

Network

Network Port	1 × RJ-45 (10/100 Base-T)
Network Protocol	FTP; RTMP; IPv6; Bonjour; IPv4; DNS; RTCP; PPPoE; NTP; RTP; 802.1x; HTTPS; SNMP; TCP/IP; DDNS; UPnP; NFS; ICMP; UDP; IGMP; HTTP; SSL; DHCP; SMTP; QoS; RTSP; ARP
Interoperability	RTMP; CGI; SDK; ONVIF (Profile S&G&T); P2P
Streaming Method	Unicast/Multicast
User/Host	20 (total bandwidth: 64 M)
Storage	Micro SD card (512 GB); FTP/SFTP; NAS
Browser	IE 9 and later versions Chrome 41 and later versions Firefox 50 and later versions iOS 10 and later versions
Management Software	DSS; DMSS
Mobile Client	iOS; Android

Certification

Certifications	CE-EMC: EN 55032; EN 61000-3-3; EN 61000-3-2; EN 50130-4; EN 55035 CE-LVD: EN 62368-1 FCC: 47 CFR FCC Part15, Subpart B, NSI C63.4 UL: UL62368-1
----------------	---

Port

Audio Input	1 channel (LINE IN, bare wire)
Audio Output	1 channel (LINE OUT,bare wire)
Alarm Linkage	Capture; recording; send email; preset; tour; pattern; alarm digital input
Alarm Event	Motion/Tampering detection; audio detection; network disconnection detection; IP conflict detection; memory card state detection; memory space detection
Alarm I/O	2/1
Audio I/O	1/1

Power

Power Supply	12 VDC/3A±25% PoE (802.3at)
Power Consumption	Basic: 9 W Max.: 20 W (Illuminator + alarm + PTZ)

Environment

Operating Temperature	−40 °C to +70 °C (−40 °F to +158 °F)
Operating Humidity	≤ 95%
Storage Temperature	−40 °C to +70 °C (−40 °F to +158 °F)
Storage Humidity	≤ 95%
Protection	IP66, TVS 6000 V lightning proof; surge protection; voltage transient protection

Structure

Product Dimensions	270.4 mm × Φ160 mm (10.65" × Φ6.30")
Net Weight	2.4 kg (5.29 lb)
Gross Weight	3.9 kg (8.60 lb)

Ordering Information

Type	Model	Description
2MP Camera	DH-SD49225GB-HNR	2MP 25x Starlight IR Network PTZ Camera
	SD49225GB-HNR	2MP 25x Starlight IR Network PTZ Camera
	PFB305W	Wall Mount Bracket
	DC 12 V/3A	Power Adapter
	PFA120	Junction Box
	PFA111	Mount Adapter
	PFB300C	Ceiling Mount Bracket
	PFB301C	Ceiling Mount Bracket
	PFA151	Corner Mount Bracket
	PFB303S	Parapet Mount Bracket
	PFB301S-E	Plane Mount Bracket
	PFA150	Pole Mount Bracket

Accessories
Included:


PFB305W
Wall Mount Bracket

Optional:


DC 12 V/3A
Power Adapter



PFA120
Junction Box



PFA111
Mount Adapter



PFB300C
Ceiling Mount
Bracket



PFB301C
Ceiling Mount
Bracket



PFA151
Corner Mount
Bracket




PFB303S
Parapet Mount
Bracket



PFB301S-E
Plane Mount
Bracket



PFA150
Pole Mount
Bracket

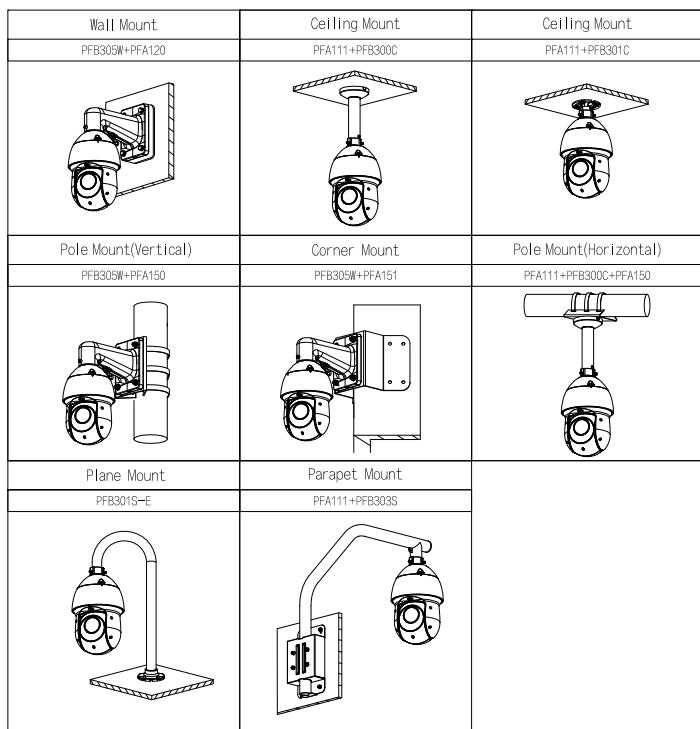

Dimensions (mm[inch])

