



**Omada BE11000 (US) / BE9300 (EU)  
Tri-Band Omnidirectional  
Indoor/Outdoor Wi-Fi 7 Access Point**

Model: EAP772-Outdoor

# Product Overview


EAP772-Outdoor is Omada's first Tri-Band Six-Stream Omnidirectional BE11000 (US) / BE9300 (EU) Outdoor Access Point. With its 6 GHz band unlocked by AFC, EAP772-Outdoor achieves true tri-band omnidirectional coverage.

An impressive 300 m<sup>2</sup> (3,200 ft<sup>2</sup>) recommended omnidirectional coverage, ensuring stable connectivity across outdoor areas, and an IP68-rated rugged design, the highest industry standard for dust and water resistance, the EAP772-Outdoor delivers robust outdoor Wi-Fi for hotels, business parks, yards, farms, and other business outbuildings.

- **Tri-Band Six-Stream Outdoor Wi-Fi 7:** Up to 11 Gbps for US and up to 9.3 Gbps for EU
- **6 GHz Band Unlocked by AFC:** AFC enables 6 GHz band outdoor uses\*
- **True Tri-Band Omnidirectional Coverage:** 300 m<sup>2</sup> (3,200 ft<sup>2</sup>) recommended coverage
- **Professional Hardware Design:** Industry-leading IP68-rated, 1× 2.5G PoE+ port, 2.4 GHz dual-polarized antennas
- **Easy and Quick Setup:** Wall/pole mounting; Omada SDN for one-click setup
- **Advanced Features:** Centralized management, mesh, and seamless roaming

\* AFC availability varies by region or country. For the supported areas, please refer to: <https://www.omadanetworks.com/support/faq/4373/>

# Product Appearance

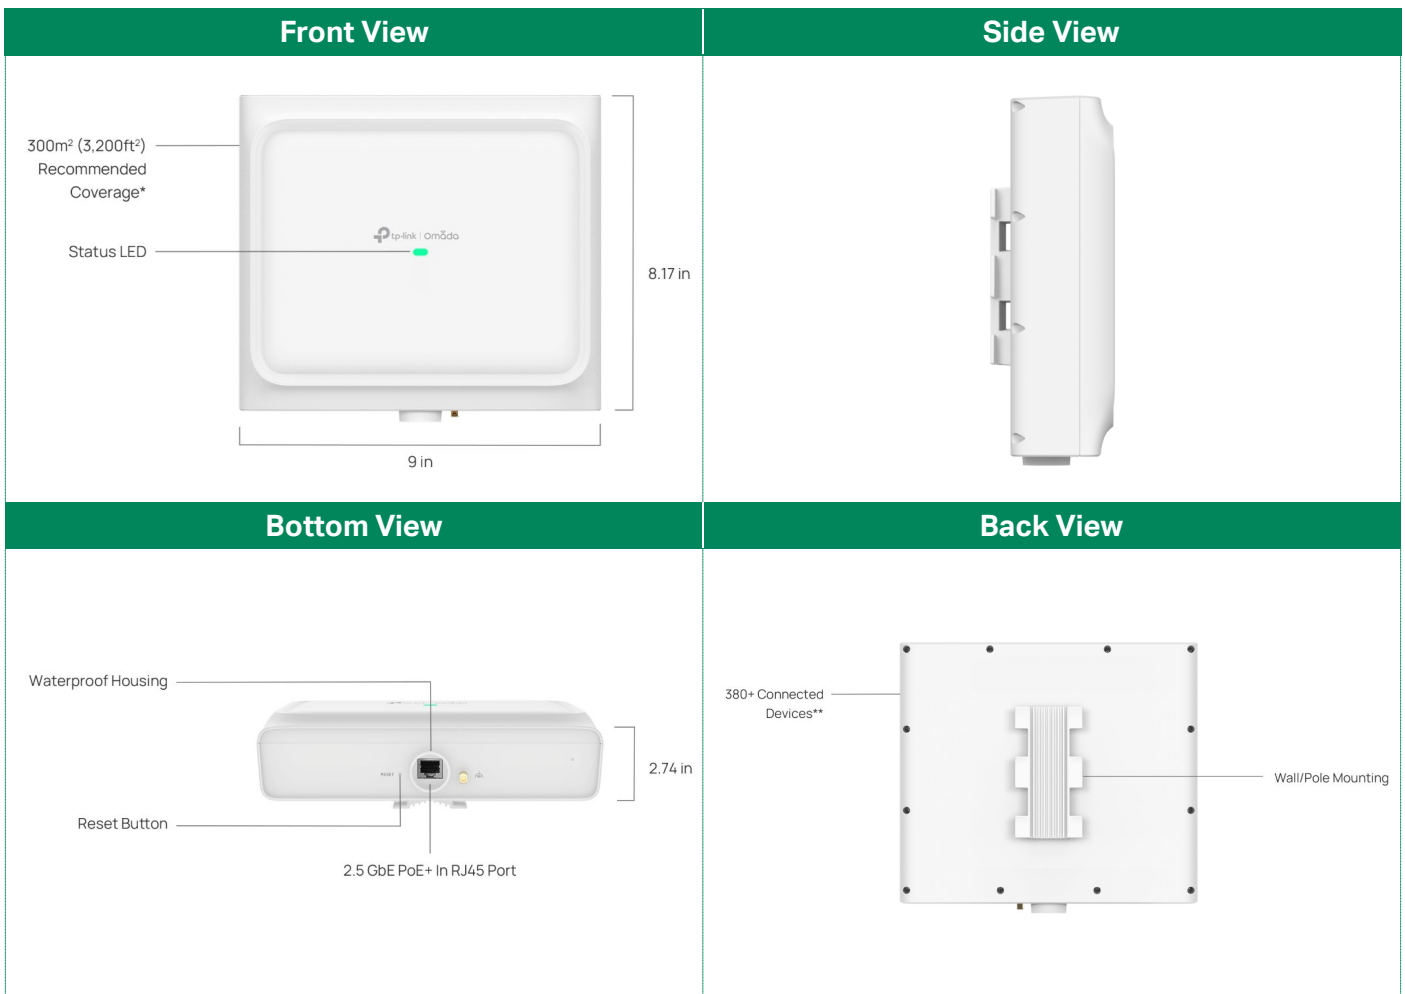


# Feature Descriptions


## Omada Wi-Fi 7 Technology: A Significant Upgrade from Wi-Fi 6

Wi-Fi 7, also referred to as IEEE 802.11be or extremely high throughput (EHT), is the next-generation Wi-Fi standard.


Building on Wi-Fi 6, Wi-Fi 7 incorporates advancements such as 320 MHz bandwidth, 4096-QAM, multi-resource unit (RU), multi-link operation (MLO), enhanced MU-MIMO, and more. These innovations enable Wi-Fi 7 to achieve higher speed, larger bandwidth, and lower latency compared to Wi-Fi 6. Wi-Fi 7 is projected to support speeds up to 30 Gbps, roughly three times faster than Wi-Fi 6.

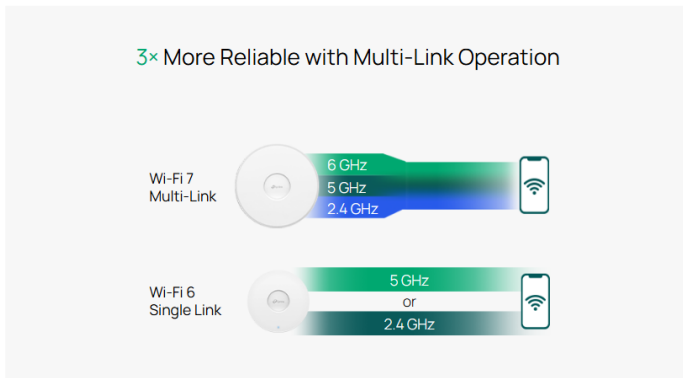


Wi-Fi 6 devices primarily rely on a single link for data transmission. In contrast, Wi-Fi 7 introduces Multi-Link Operation (MLO), enabling devices to utilize multiple links simultaneously, thereby achieving higher throughput, lower latency, and improved reliability.

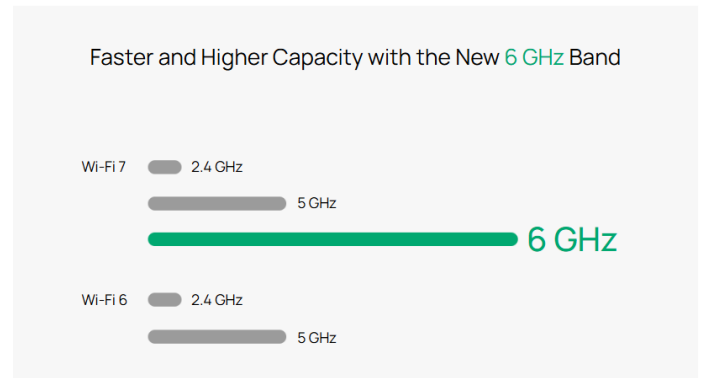


The new 6 GHz band offers a larger spectrum and cleaner channels compared to traditional bands, delivering higher capacity, faster connectivity, and less interference.

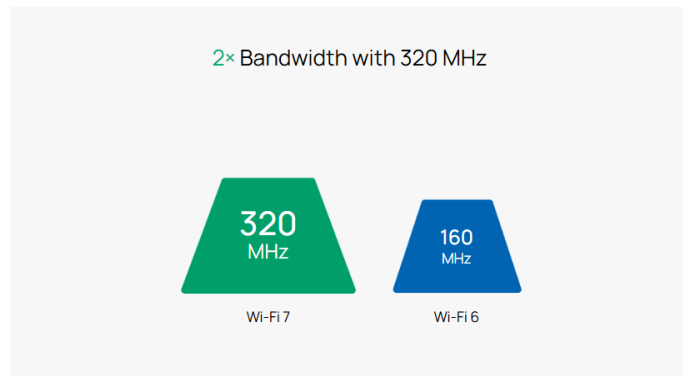


With 320 MHz ultra-wide channels, Wi-Fi 7 doubles the bandwidth of Wi-Fi 6's 160 MHz and the number of subcarriers, delivering dramatically higher data transfer rates.

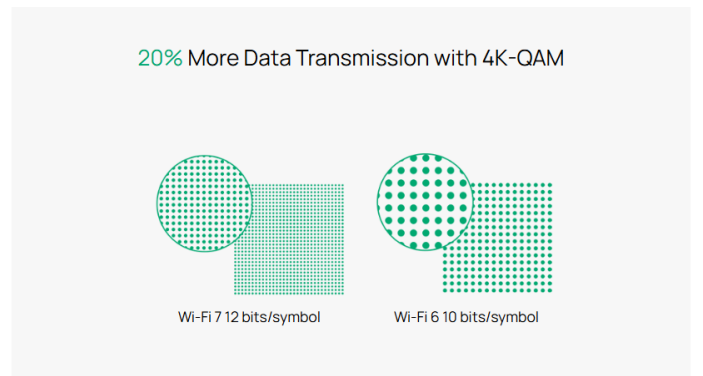

4096-QAM enables each symbol to carry 12 bits instead of 10, increasing theoretical transmission rates by 20% compared to Wi-Fi 6's 1024-QAM. This higher transmission rate boosts data throughput, delivering enhanced speeds and improved network reliability.

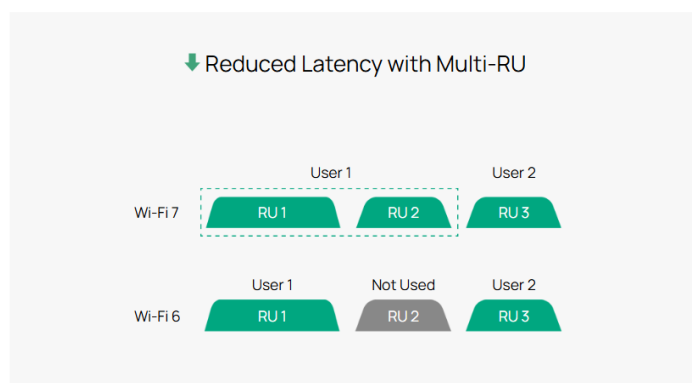

Wi-Fi 6 restricts each user to a single resource unit (RU), limiting spectrum flexibility. Wi-Fi 7 overcomes this limitation by allowing multiple RUs to be allocated to a single user and enabling RU aggregation, improving data throughput and spectral efficiency.

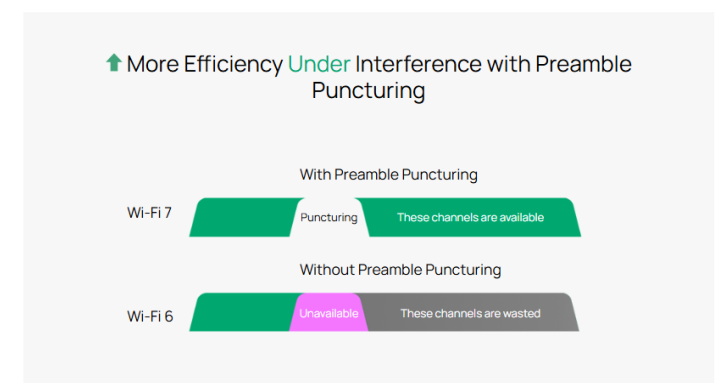

Preamble puncturing identifies and excludes interference-affected subcarriers, reducing spectral waste and boosting efficiency in challenging wireless conditions.

## **True Tri-Band Omnidirectional Coverage, 6G Band First Unlocked by AFC**

The 6 GHz band, enabled by AFC compliance, provides cleaner spectrum resources and reduced signal interference, allowing the EAP772-Outdoor to deliver true tri-band omnidirectional coverage, critical for reliable connectivity in crowded outdoor settings. Users can enjoy uninterrupted outdoor connectivity, even using bandwidth-intensive applications like 4K/8K gaming, live streaming, and real-time data transfers.

For more details on AFC, please visit: <https://www.omadanetworks.com/support/faq/4373/>

## **Industry-Leading IP68 Weatherproof Design for Extreme Conditions**

The IP68-rated enclosure offers complete dustproof protection and effectively prevents damage from water immersion in water deeper than five feet for more than 30 minutes, allowing it to withstand harsh environments such as heavy rain, strong winds, and humid conditions. Additionally, an extended temperature tolerance of -30°C to 70°C makes it ideal for extremely hot and cold environments.

## **Professional Hardware Architecture**

The EAP772-Outdoor features a 2.5G port for greater bandwidth, supporting high-traffic applications like HD video streaming and online gaming. With 802.3at PoE support, there's no need for more wiring. Plug it into the existing Ethernet cables, and you're ready.

## **Dual-Polarized 2.4 GHz Antennas, Better Anti-Interference Performance**

Equipped with dual-polarized 2.4 GHz antennas, the EAP772-Outdoor brings enhanced anti-interference capabilities. Users can easily switch between vertical and horizontal antenna polarization to avoid interference in different outdoor scenarios through the Omada controllers. This design maximizes signal stability in complex outdoor layouts, even in urban areas with strong base station interference.

## **GPS—Know Your Devices Anywhere**

See at a glance the location of access points in outdoor scenarios on a GPS map via the Omada controllers\*, enabling easy management visualization.

\* Omada Cloud Standard and on-premises Omada controllers version 5.15.24 and above support the GPS Map.

## **Easy and Quick Setup**

Flexible installation options, including wall and pole mounts, enable quick deployment in diverse settings. Integration with Omada SDN allows for one-click adoption and automatic device discovery, streamlining the setup process.

## **Cloud-Based Centralized Management**

As part of Omada's unified SDN ecosystem, the EAP772-Outdoor works harmoniously with Omada switches, gateways, and controllers. Businesses gain end-to-end visibility, automated optimization, zero-touch provisioning, and batch configuration—all managed from a single cloud interface.

# Specifications

## Hardware Specifications

Item	Description	
Wi-Fi Standards	6 GHz: IEEE 802.11ax/be 5 GHz: IEEE 802.11a/n/ac/ax/be 2.4 GHz: IEEE 802.11b/g/n/ax/be	
802.11be	Spatial Streams	<ul style="list-style-type: none"> <li>2.4 GHz: 2×2 Uplink/Downlink MU-MIMO with 2 spatial streams</li> <li>5 GHz: 2×2 Uplink/Downlink MU-MIMO with 2 spatial streams</li> <li>6 GHz: 2×2 Uplink/Downlink MU-MIMO with 2 spatial streams</li> </ul>
	Frequency Bands	2.400 to 2.4835 GHz ISM 5.150 to 5.250 GHz U-NII-1 5.250 to 5.350 GHz U-NII-2A 5.470 to 5.725 GHz U-NII-2C 5.725 to 5.850 GHz U-NII-3/ISM 6.105 to 6.425 GHz U-NII-5 6.525 to 6.875 GHz U-NII-7 *Note: Country-Specific Restriction Apply
	Bandwidth	2.4 GHz: 20 MHz/40 MHz 5 GHz: 20 MHz/40 MHz/80 MHz/160/240 MHz 6 GHz: 20 MHz/40 MHz/80 MHz/160 MHz/320 MHz *Note: Country-Specific Restriction Apply
	Wireless Data Rate	2.4 GHz + 5 GHz + 6 GHz: 10777 Mbps <ul style="list-style-type: none"> <li>2.4 GHz: 8.6 Mbps to 688 Mbps (MCS0-MCS13, NSS=1 to 2, EHT20/40)</li> <li>5 GHz: 8.6 Mbps to 4324 Mbps (MCS0-MCS13, NSS=1 to 2, EHT20/40/80/160/240)</li> <li>6 GHz: 8.6 Mbps to 5765 Mbps (MCS0-MCS13, NSS=1 to 2, EHT20/40/80/160/320)</li> </ul>
	Radio Technology	Uplink/downlink OFDMA (Orthogonal Frequency-Division Multiple Access)
	Modulation Type	4096-QAM, 1024-QAM, 256-QAM, 64-QAM, 16-QAM, QPSK, BPSK
	Frame Aggregation	<ul style="list-style-type: none"> <li>A-MPDU (Aggregate MAC Protocol Data Unit) for Tx/Rx</li> <li>A-MSDU (Aggregate MAC Service Data Unit) for Tx/Rx</li> </ul>
	Others	<ul style="list-style-type: none"> <li>Preamble Puncturing</li> <li>BSS Coloring</li> <li>Multi-Link Operation (MLO)</li> <li>TWT (Target Wake Time)</li> <li>Maximal Ratio Combining (MRC)</li> <li>Transmit Beamforming (TxBF)</li> <li>Wi-Fi Protect Access 3 (WPA3)</li> <li>Dynamic Frequency Selection (DFS)</li> <li>Cycle Delay Diversity (CDD)</li> <li>Cycle Shift Diversity (CSD)</li> <li>Space-Time Block Coding (STBC)</li> <li>Low-Density Parity Check (LDPC)</li> </ul>

Item	Description	
802.11ax	Spatial Streams	<ul style="list-style-type: none"> <li>• 2.4 GHz: 2×2 Uplink/Downlink MU-MIMO with 2 spatial streams</li> <li>• 5 GHz: 2×2 Uplink/Downlink MU-MIMO with 2 spatial streams</li> <li>• 6 GHz: 2×2 Uplink/Downlink MU-MIMO with 2 spatial streams</li> </ul>
	Frequency Bands	2.400 to 2.4835 GHz ISM 5.150 to 5.250 GHz U-NII-1 5.250 to 5.350 GHz U-NII-2A 5.470 to 5.725 GHz U-NII-2C 5.725 to 5.850 GHz U-NII-3/ISM 5.925 to 6.425 GHz U-NII-5 6.525 to 6.875 GHz U-NII-7 *Note: Country-Specific Restriction Apply
	Bandwidth	2.4 GHz: 20 MHz/40 MHz 5 GHz: 20 MHz/40 MHz/80 MHz/160 MHz 6 GHz: 20 MHz/40 MHz/80 MHz/160 MHz *Note: Country-Specific Restriction Apply
	Wireless Data Rate	<ul style="list-style-type: none"> <li>• 2.4 GHz: 8.6 Mbps to 573 Mbps (MCS0-MCS11, NSS=1 to 2, HE20/40)</li> <li>• 5 GHz: 8.6 Mbps to 2402 Mbps (MCS0-MCS11, NSS=1 to 2, HE20/40/80/160)</li> <li>• 6 GHz: 8.6 Mbps to 2402 Mbps (MCS0-MCS11, NSS=1 to 2, HE20/40/80/160)</li> </ul> *Note: Country-Specific Restriction Apply
	Radio Technology	Uplink/downlink OFDMA (Orthogonal Frequency-Division Multiple Access)
	Modulation Type	1024-QAM, 256-QAM. 64-QAM, 16-QAM, QPSK, BPSK
	Frame Aggregation	<ul style="list-style-type: none"> <li>• A-MPDU (Aggregate MAC Protocol Data Unit) for Tx/Rx</li> <li>• A-MSDU (Aggregate MAC Service Data Unit) for Tx/Rx</li> </ul>
	Others	<ul style="list-style-type: none"> <li>• TWT (Target Wake Time)</li> <li>• MRC (Maximal Ratio Combining)</li> <li>• TxBF (Transmit Beamforming)</li> <li>• WPA3 (Wi-Fi Protect Access 3)</li> <li>• DFS (Dynamic Frequency Selection)</li> <li>• CDD (Cycle Delay Diversity)</li> <li>• CSD (Cycle Shift Diversity)</li> <li>• STBC (Space-Time Block Coding)</li> <li>• LDPC (Low-Density Parity-Check)</li> </ul>
802.11ac	Spatial Streams	<ul style="list-style-type: none"> <li>• 5 GHz: 2×2 Downlink MU-MIMO with 2 spatial streams</li> </ul>
	Frequency Bands	5.150 to 5.250 GHz U-NII-1 5.250 to 5.350 GHz U-NII-2A 5.470 to 5.725 GHz U-NII-2C 5.725 to 5.850 GHz U-NII-3/ISM *Note: Country-Specific Restriction Apply
	Bandwidth	5 GHz: 20 MHz/40 MHz/80/160 MHz
	Wireless Data Rate	<ul style="list-style-type: none"> <li>• 5 GHz: 8.6 Mbps to 160M Mbps (MCS0-MCS9, NSS=1 to 2, VHT20/40/80/160)</li> </ul>

Item	Description	
	Radio Technology	OFDM (Orthogonal Frequency-Division Multiplexing)
	Modulation Type	256-QAM, 64-QAM, 16-QAM, QPSK, BPSK
	Frame Aggregation	<ul style="list-style-type: none"> <li>• A-MPDU (Aggregate MAC Protocol Data Unit) for Tx/Rx</li> <li>• A-MSDU (Aggregate MAC Service Data Unit) for Tx/Rx</li> </ul>
	Others	<ul style="list-style-type: none"> <li>• MRC (Maximal Ratio Combining)</li> <li>• TxBF (Transmit Beamforming)</li> <li>• DFS (Dynamic Frequency Selection)</li> <li>• CDD (Cycle Delay Diversity)</li> <li>• CSD (Cycle Shift Diversity)</li> <li>• STBC (Space-Time Block Coding)</li> <li>• LDPC (Low-Density Parity-Check)</li> </ul>
802.11n	Spatial Streams	<ul style="list-style-type: none"> <li>• 2.4 GHz: 2×2 MIMO with 2 spatial streams</li> <li>• 5 GHz: 2×2 MIMO with 2 spatial streams</li> </ul>
	Frequency Bands	2.400 to 2.4835 GHz ISM 5.150 to 5.250 GHz U-NII-1 5.250 to 5.350 GHz U-NII-2A 5.470 to 5.725 GHz U-NII-2C 5.725 to 5.850 GHz U-NII-3/ISM *Note: Country-Specific Restriction Apply
	Bandwidth	20 MHz/40 MHz
	Wireless Data Rate	<ul style="list-style-type: none"> <li>• 2.4 GHz: 8.6 Mbps to 300 Mbps (MCS0-MCS7, NSS=1 to 2, HT20/40)</li> <li>• 5 GHz: 8.6 Mbps to 300 Mbps (MCS0-MCS7, NSS=1 to 2, HT20/40)</li> </ul>
	Radio Technology	OFDM (Orthogonal Frequency-Division Multiplexing)
	Modulation Type	64-QAM, 16-QAM, QPSK, BPSK
	Frame Aggregation	<ul style="list-style-type: none"> <li>• A-MPDU (Aggregate MAC Protocol Data Unit) for Tx/Rx</li> <li>• A-MSDU (Aggregate MAC Service Data Unit) for Tx/Rx</li> </ul>
	Others	<ul style="list-style-type: none"> <li>• MRC (Maximal Ratio Combining)</li> <li>• TxBF (Transmit Beamforming)</li> <li>• DFS (Dynamic Frequency Selection)</li> <li>• CDD (Cycle Delay Diversity)</li> <li>• CSD (Cycle Shift Diversity)</li> <li>• STBC (Space-Time Block Coding)</li> <li>• LDPC (Low-Density Parity-Check)</li> </ul>
Antenna	Wi-Fi	<ul style="list-style-type: none"> <li>• 2.4 GHz: 2 × 4 dBi (peak gain), internal omnidirectional antennas</li> <li>• 5 GHz: 2 × 6 dBi (peak gain), internal omnidirectional antennas</li> <li>• 6 GHz: 2 × 6 dBi (peak gain), internal omnidirectional antennas</li> </ul> *Note: The gains above are the single-antenna peak gains.
	IoT	<ul style="list-style-type: none"> <li>• Bluetooth: 1 × 3 dBi (peak gain), internal omnidirectional antennas</li> </ul>
	GNSS	1× 3dBi (peak gain), integrated omnidirectional antennas

Item	Description	
Interfaces	<ul style="list-style-type: none"> <li>1 x 10M/100M/1000M/2.5Gbps Multigigabit Ethernet Port (RJ45); PoE in</li> <li>1 x Grounding Terminal</li> </ul>	
IoT	BLE 5.2, 1Mbps	
GNSS	GPS (L1: 1574.2MHz), Galileo, GLOANASS, BDS (B1)	
Memory	<ul style="list-style-type: none"> <li>Flash: 128Mbit</li> <li>DRAM: 8192Mbit</li> </ul>	
Button	1 × Reset button: Press the button for longer than 5 seconds to make the device restore to factory settings.	
Indicator	1 × multi-color system LED indicates on the front: <ul style="list-style-type: none"> <li>Power-on status</li> <li>Firmware initialization or upgrade status</li> <li>Uplink service status</li> <li>Error status</li> </ul>	
Reliability	MTBF (Mean Time between Failure)	- hours at the operating temperature of 25°C (77°F)
Power Supply	Input	802.3at PoE+: 42.5 - 57 V=0.6A
	Output	/
Power Consumption	<ul style="list-style-type: none"> <li>802.3at (PoE+): 23w, 2.4GHz radio 2×2, 5GHz radio 2×2, 6GHz radio 2×2, wired link rate can be up to 2.5 Gbps, etc.</li> <li>Idle mode: 8W(PoE)</li> </ul>	
Surge/Lightning Protection	Ethernet Ports: ±6 kV	
ESD/EMP Protection	<ul style="list-style-type: none"> <li>Air discharge: ±8 kV</li> <li>Contact discharge: ±4 kV</li> </ul> <p><i>*Note: ESD/EMP Protection means Electrostatic Discharge/Electromagnetic Pulse Protection independently.</i></p>	
Tx Power	Maximum transmit power	CE (ERIP) <ul style="list-style-type: none"> <li>2.4 GHz: 20 dBm</li> <li>5 GHz: 23 dBm in U-NII-1, 23 dBm in U-NII-2A, 28 dBm in U-NII-2C,</li> <li>6 GHz: 23 dBm</li> </ul> FCC (Conducted Power) <ul style="list-style-type: none"> <li>2.4 GHz: 25 dBm</li> <li>5 GHz: 25 dBm in U-NII-1, 25 dBm in U-NII-2A, 25 dBm in U-NII-2C, 25 dBm in U-NII-3</li> <li>6 GHz: 25 dBm</li> </ul> <p><i>*Note: MIMO combined power, excluding antenna gains. The actual transmit power depends on local laws and regulations.</i></p>

Item	Description	
	Minimum transmit power	CE (ERIP) <ul style="list-style-type: none"> <li>• 2.4 GHz: 7 dBm</li> <li>• 5 GHz: 7 dBm in U-NII-1, 7 dBm in U-NII-2A, 7 dBm in U-NII-2C, 7 dBm in U-NII-3</li> <li>• 6 GHz: 7 dBm</li> </ul> FCC (Conducted Power) <ul style="list-style-type: none"> <li>• 2.4 GHz: 4 dBm</li> <li>• 5 GHz: 4 dBm in U-NII-1, 4 dBm in U-NII-2A, 4 dBm in U-NII-2C, 4dBm in U-NII-3</li> <li>• 6 GHz: 4 dBm</li> </ul> *Note: MIMO combined power, excluding antenna gains. The actual transmit power depends on local laws and regulations.
	Adjustable power increment	1 dBm
Environment	Temperature	<ul style="list-style-type: none"> <li>• Operating: -40°C to +70°C (-40°F to +158°F)</li> <li>• Storage: -30°C to +70°C (-22°F to +158°F)</li> </ul>
	Humidity	<ul style="list-style-type: none"> <li>• Operating: 10% to 90% (non-condensing)</li> <li>• Storage: 5% to 90% (non-condensing)</li> </ul>
	Altitude	<ul style="list-style-type: none"> <li>• Storage: up to + 2000m(6561feet)</li> <li>• Operating: up to + 2000m(6561feet)</li> </ul>
	Windproof	Class 16
	Weatherproof Enclosure	IP68
Unit	Dimensions (W×D×H)	<ul style="list-style-type: none"> <li>• Main Unit: 230×207.5×69.7 mm (9.06 in. x 8.17 in. x 2.74 in.)</li> <li>• Shipping Unit: 324×104×245 mm (12.76 in. x 4.09 in. x 9.65 in.)</li> </ul>
	Weight	<ul style="list-style-type: none"> <li>• Main Unit: 1.41 kg (3.11 lbs)</li> <li>• Mounting Bracket: 0.048 kg (0.11 lbs)</li> <li>• Shipping Unit: 1.83 kg (4.1 lbs)</li> </ul>
	Mounting	<ul style="list-style-type: none"> <li>• Pole Mount (Kits included)</li> <li>• Wall Mount (Kits included)</li> </ul>

## Software Specifications

Item	Description	
Wireless Functions	Maximum number of BSSIDs	24 (8 on each band)
	Maximum number of associated STAs	380+
	Guest Network	Yes
	ACS (Automatic Channel Selection)	Yes
	Airtime Fairness	Yes
	Band Steering	Yes
	802.11 Rate Control	Yes
	Rogue AP Detection	Yes
	URL Filtering	Yes
	RF Scan	Yes
	WLAN Optimization	Yes
	WIDS/WIPS	No
	Lock to AP	Yes
	Rate Limit	<ul style="list-style-type: none"> <li>• SSID Rate Limit</li> <li>• Client Rame Limit</li> </ul>
	Load Balance	<ul style="list-style-type: none"> <li>• Maximum Associated Clients</li> <li>• RSSI Threshold</li> </ul>
MLO	<ul style="list-style-type: none"> <li>• 2.4 GHz+5 GHz</li> <li>• 2.4 GHz+6 GHz</li> <li>• 5 GHz+6 GHz</li> <li>• 2.4 GHz+5 GHz+6 GHz</li> </ul>	
Roaming	<ul style="list-style-type: none"> <li>• 802.11 k</li> <li>• 802.11v</li> <li>• 802.11r</li> <li>• Non-Stick Roaming</li> <li>• Ping-Pong Roaming Suppression</li> <li>• AI Roaming</li> </ul> <p style="color: green; margin-top: 5px;">*Note: Only support Layer 2 Roaming currently.</p>	
Multicast/Broadcast Management	<ul style="list-style-type: none"> <li>• Multicast-to-Unicast Conversion</li> <li>• ARP-to-Unicast Conversation</li> <li>• Multicast Filtering</li> <li>• Multicast/Broadcast Rate Limit</li> </ul>	

Item	Description	
	QoS (Quality of Service)	<ul style="list-style-type: none"> <li>• WMM (Wi-Fi Multimedia)</li> <li>• DSCP (Differentiated Services Code Point)</li> <li>• U-APSD (Unscheduled Automatic Power Save Delivery)</li> </ul>
Security and Authentication	ACL	
	MAC Filter	
	802.1X Authentication	
	MAC-Based Authentication	
	<ul style="list-style-type: none"> <li>• None</li> <li>• Enhanced Open</li> <li>• WPA/WPA2/WPA3-Personal</li> <li>• WPA/WPA2/WPA3-Enterprise</li> </ul>	
	Radius Accounting	
	<ul style="list-style-type: none"> <li>• PPSK without Radius</li> <li>• PPSK with Radius (Generic Radius with bound MAC/EKMS/Generic Radius with unbound MAC)</li> </ul>	
	Captive Portal	<ul style="list-style-type: none"> <li>• No Authentication</li> <li>• Simple Password</li> <li>• Hotspot (Voucher / Local User / SMS / RADIUS / Form Auth)</li> <li>• RADIUS Server</li> <li>• External LDAP Server</li> <li>• External Portal Server</li> <li>• Pre-Authentication Access</li> <li>• Authentication-Free Client</li> </ul>
	EAP Types	<ul style="list-style-type: none"> <li>• EAP-TLS</li> <li>• EAP-TTLS</li> <li>• EAP-PEAP</li> <li>• EAP-CHAP</li> <li>• EAP-SIM</li> <li>• EAP-AKA</li> <li>• EAP-GTC</li> <li>• EAP-FAST</li> <li>• EAP-PEAP</li> <li>• EAP-MD5</li> <li>• EAP-MSCHAPv2</li> <li>• PEAPv0</li> <li>• PEAPv1</li> </ul>
Management methods	Omada Controller	<ul style="list-style-type: none"> <li>• Omada Controller V5.15.24 and above</li> <li>• Omada Essential V5.15.24 and above</li> </ul>
	App	Omada App V4.20 and above
	Standalone Management	Yes

Item	Description	
	Standalone Mesh	No
	SSH	Yes
	SNMP	v1, v2c, v3
Operating Modes	AP	Yes
	Repeater	Yes
	Mesh	Yes
System Feature	System Log	Yes
	Reboot Schedule	Yes
	WLAN Schedule	Yes
	NTP (Network Time Protocol)	Yes
	Email Alerts	Yes
	Firmware Upgrade	Yes
	Restore & Backup	Yes
LED Control	Yes	
Network Features	VLAN	<ul style="list-style-type: none"> <li>• SSID VLAN</li> <li>• Dynamic VLAN</li> <li>• Management VLAN</li> </ul>
	Static IP / DHCP Client	Yes
	IPv4/IPv6	Yes
	LLDP (Link Layer Discovery Protocol)	Yes
	mDNS	Yes
	Tools	<ul style="list-style-type: none"> <li>• Ping / Traceroute / DNSLookup / ARP Table</li> <li>• Packet Capture</li> <li>• Terminal</li> </ul>

# Standards Compliance and Certifications

Item	Category	Description
Standards compliance	IEEE Standards	<ul style="list-style-type: none"> <li>• IEEE 802.11a/b/g/n/ac/ax/be</li> <li>• IEEE 802.11e/i/k/v/r</li> <li>• IEEE 802.1x/q</li> <li>• IEEE 802.3at</li> <li>• IEEE 802.3ab</li> <li>• IEEE 802.3bz</li> <li>• IEEE 802.3x</li> </ul>
	Radio Standards	<ul style="list-style-type: none"> <li>• ETSI EN 300 328</li> <li>• ETSI EN 301 893</li> <li>• EN 303 413</li> <li>• EN 303 687</li> <li>• EN 50385 EN50665 EN IEC 62311</li> <li>• FCC Part 15E</li> <li>• RSS-247, RSS-GEN</li> <li>• LP0002</li> </ul>
	EMC standards	<ul style="list-style-type: none"> <li>• EN 55032</li> <li>• EN 55035</li> <li>• EN 301489-1</li> <li>• EN 301489-17</li> <li>• EN 301489-19</li> <li>• FCC Part 15C</li> <li>• ICES-003 issue7</li> <li>• CNS 15936</li> </ul>
	Safety Standards	<ul style="list-style-type: none"> <li>• EN 62368-1</li> <li>• IEC 62368-1</li> <li>• CNS 15598-1</li> </ul>
	Security Standards	<ul style="list-style-type: none"> <li>• WPA-Personal/Enterprise</li> <li>• WPA2-Personal/Enterprise</li> <li>• WPA3-Personal/Enterprise</li> <li>• OWE</li> </ul>
	RoHS	<ul style="list-style-type: none"> <li>• Directive 2011/65/EU, Directive (EU) 2015/863</li> <li>• EN IEC 63000: 2018</li> </ul>
	Others	<ul style="list-style-type: none"> <li>• Equipment Radio Regulations: 2008 (including amendments)</li> <li>• VCCI-CISPR 32</li> </ul>
	Certifications	<ul style="list-style-type: none"> <li>• Wi-Fi Alliance: Wi-Fi 7 (R1), Wi-Fi 6 (R2), Wi-Fi 6E, WPA3-R3, WPA3-Suite B, Enhanced Open Security</li> <li>• FCC/CE/NCC/VCCI/JRF/BSMI/WFA</li> </ul>


# RF Performance

Frequency Band	Wi-Fi Protocol & Bandwidth	MCS Index / Data Rate	EU/US Maximum Transmit Power (dBm) per transmit chain	Receiver Sensitivity (dBm) per receive chain	
2.4 GHz	802.11n, HT20	MCS0	15/22	-96	
		MCS7	15/22	-78	
	802.11n, HT40	MCS0	15/22	-93	
		MCS7	15/22	-75	
	802.11ax, HE20	MCS0	15/22	-96	
		MCS11	15/20	-66	
	802.11ax, HE40	MCS0	15/22	-93.0	
		MCS11	15/20	-66.0	
	802.11be, EHT20	MCS0	15/22	-96	
		MCS13	15/19	NA	
	802.11be, EHT40	MCS0	15/22	-93	
		MCS13	15/19	NA	
	5 GHz	802.11n, HT20	MCS0	22/22	-95
			MCS7	20/20	-75.5
802.11n, HT40		MCS0	22/22	-91.5	
		MCS7	20/20	-72	
802.11ac, HT20		MCS0	22/22	-95.5	
		MCS7	19/19	-76	
802.11ac, HT40		MCS0	22/22	-92.5	
		MCS9	19/19	-67	
802.11ac, HT80		MCS0	22/22	-89.5	
		MCS9	19/19	-64	
802.11ax, HE20		MCS0	22/22	-95	
		MCS11	18/18	-66	
802.11ax, HE40		MCS0	22/22	-92.5	
		MCS11	18/18	-64.5	
802.11ax, HE80		MCS0	22/22	-89	
		MCS11	18/18	-61	
802.11ax, HE160		MCS0	22/22	-88	


Frequency Band	Wi-Fi Protocol & Bandwidth	MCS Index / Data Rate	EU/US Maximum Transmit Power (dBm) per transmit chain	Receiver Sensitivity (dBm) per receive chain	
	802.11be, EHT20	MCS11	18/18	-61	
		MCS0	22/22	-96	
	802.11be, EHT40	MCS13	18/18	-61	
		MCS0	22/22	-93	
	802.11be, EHT80	MCS13	18/18	-57	
		MCS0	22/22	-89	
	802.11be, EHT160	MCS13	18/18	-55	
		MCS0	22/22	-87	
	6 GHz	802.11ax, HE20	MCS0	17/22	-95
			MCS11	17/18	-65
		802.11ax, HE40	MCS0	17/22	-92
			MCS11	17/18	-64.5
802.11ax, HE80		MCS0	17/22	-89	
		MCS11	17/18	-60.5	
802.11ax, HE160		MCS0	17/22	-87	
		MCS11	17/18	-61	
802.11be, EHT20		MCS0	17/22	-95.0	
		MCS13	17/18	-60.5	
802.11be, EHT40		MCS0	17/22	-91.5	
		MCS13	17/18	-57	
802.11be, EHT80		MCS0	17/22	-89	
		MCS13	17/18	-54	
802.11be, EHT160		MCS0	17/22	-86.5	
		MCS13	17/17	-53.5	
802.11be, EHT320		MCS0	17/22	-82.5	
		MCS13	16/16	-53.5	

# Antenna Radiation Patterns


## 2.4 GHz

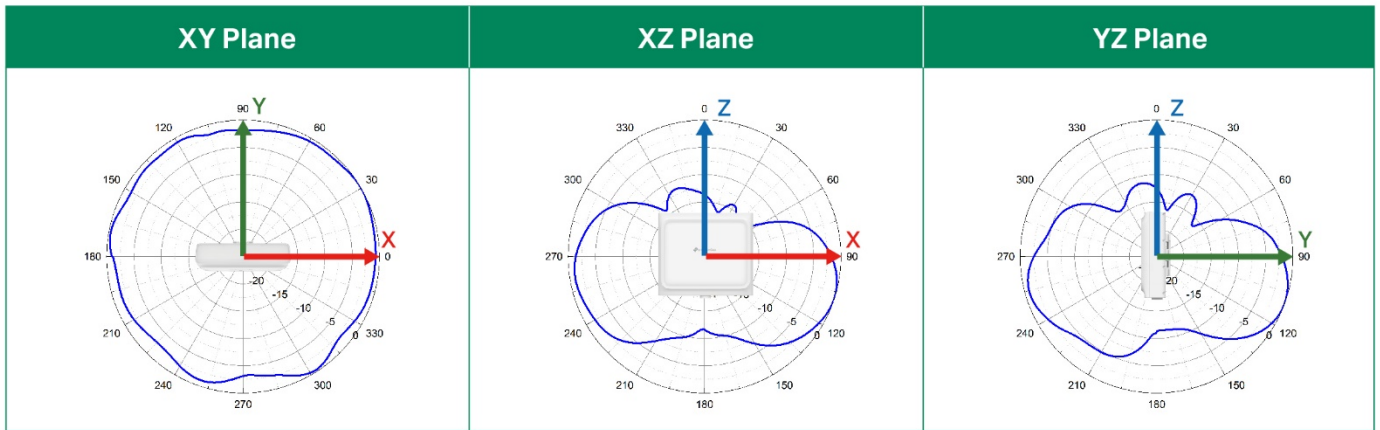

## 5 GHz

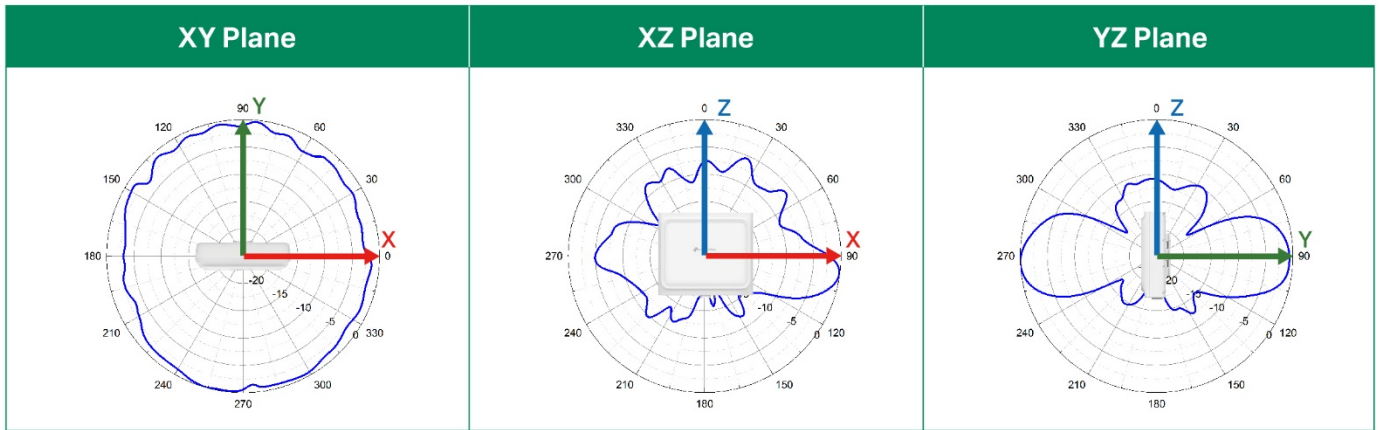

## 6 GHz

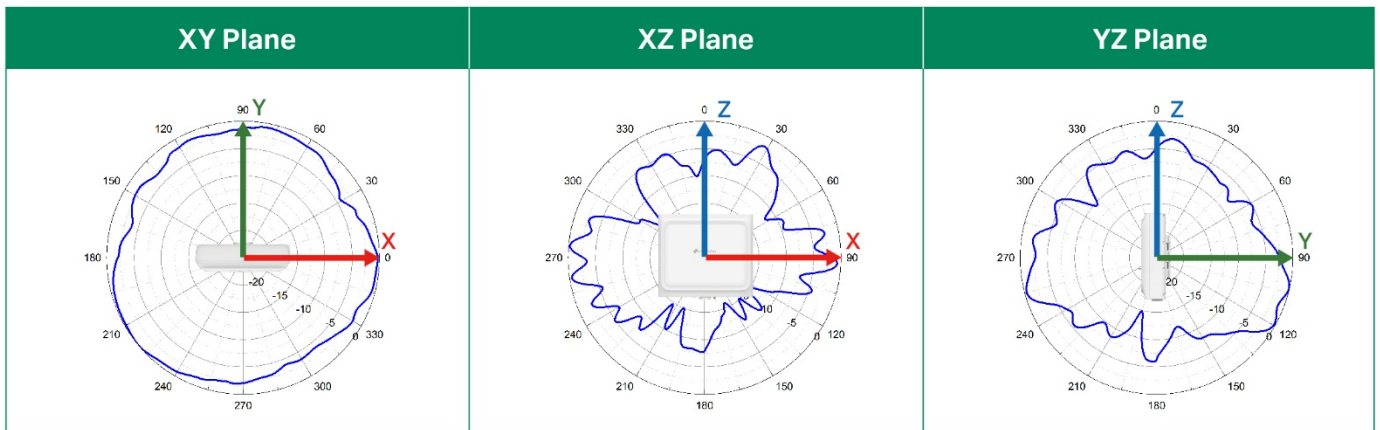

# Package Contents

Item	Quantity
EAP772-Outdoor	1
Waterproof Kit	1 (See the picture below for details)
Mounting Kit	1 (See the picture below for details)
Installation Guide	1

